

TECHNICAL SPECIFICATIONS

WSA4BD Series

High Efficiency Air Conditioner 13.4 SEER2 Residential System 1-1/2 – 5 Ton Capacity


The WSA4BD Series of air conditioners offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a full line of quality, split system cooling equipment.



FEATURES and BENEFITS

- **Quality Compressor:** Utilizes best-in-class Copeland Scroll™ compressor technology to provide quiet, reliable performance.
- **Mesh Hail Guard and Powder-Coated Wire Guard:** Solidly built to ensure reliable performance units are surrounded by a mesh hail guard and powder-coated wire guard that protects the condenser coil from potential damage caused by extreme weather or flying debris.
- **Permanently Lubricated Motor:** Sealed fan motor provides maintenance-free, quiet operation while protecting components from rain and snow.
- **Removable Top Grille Assembly:** Allows ease of service from the top without disconnecting fan motor leads.
- **High Pressure Switch:** Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter Drier:** Included with unit, field installed.
- **One Piece Top/Orifice:** Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access:** Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Composite Base Pan:** Absorbs sound and is corrosion resistant. Composite offers superior grip strength to steel pans while reducing weight and vibration.
- **Swept Wing Fan Blade:** Aerodynamic design cuts through the air and reduces unwanted noise from air turbulence.
- **All-Aluminum Coils:** All aluminum coils in all models which provides high corrosion resistance.


MODEL IDENTIFICATION CODES

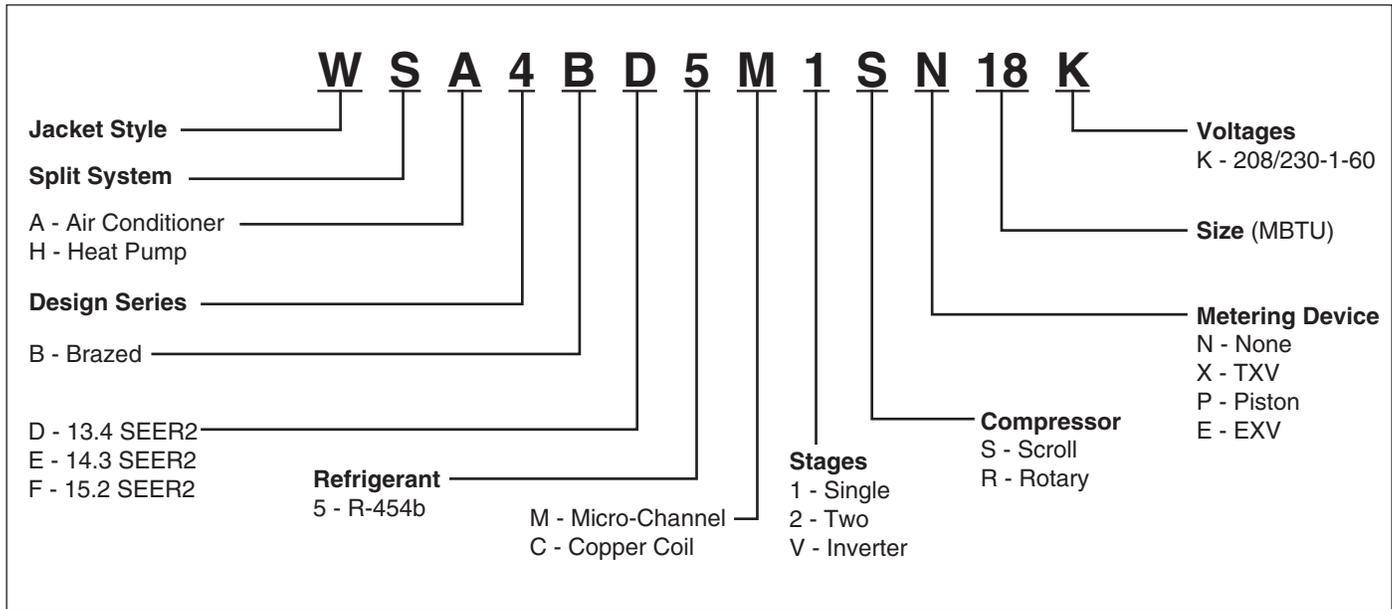

DIMENSIONS

AIR CONDITIONER OUTDOOR SECTION

WSA4BD	18K	24K	30K	36K	42K	48K	60K
H	23	27	27	27	31	35	43
W	22.75	22.75	31	31	31	31	31
D	22.75	22.75	31	31	31	31	31

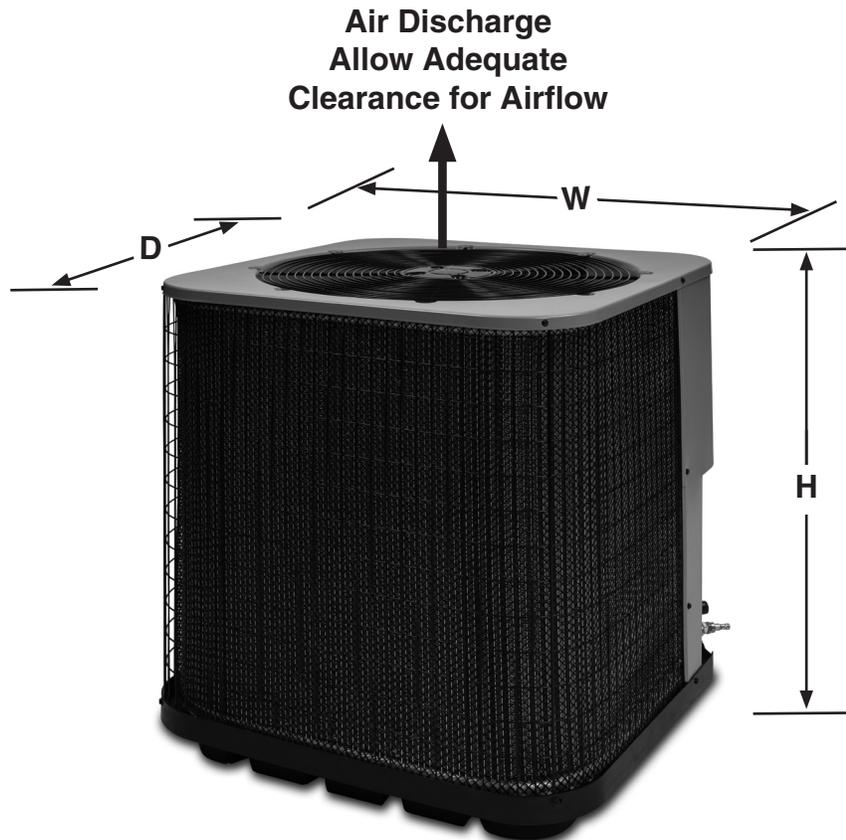

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

13.4 SEER2 — High Efficiency — Single Phase

Model Number WSA4BD5M		1SN18K	1SN24K	1SN30K	1SN36K	1SN42K	1SN48K	1SN60K	
Electrical Data	Volts-Cycles-Phase (1)	208/230-60-1							
	Delay Fuse Maximum (2)	15	20	25	30	30	50	50	
	Minimum Circuit Ampacity	10.8	13.2	16.8	18.3	19.9	29.5	32.2	
Component Data	Fan Motor	HP	1/20	1/20	1/8	1/4	1/4	1/4	1/3
	Compressor Data	LRA	41.5	60.2	75.6	82.5	109	126	157
Refrigerant suction line O.D. NOTE: Liquid line is 3/8" O.D. for entire length.		0-24 ft.	5/8" (3)	5/8" (3)	3/4"	3/4"	7/8"	7/8"	7/8"
		25-39 ft.	5/8" (3)	3/4"	3/4"	3/4"	7/8"	7/8"	1-1/8" (5)
		40-75 ft.	5/8" (3)	3/4"	3/4"	7/8" (4)	7/8"	7/8"	1-1/8" (5)
Approximate Shipping Weight (lbs.)			126	130	161	168	203	207	238
Sound Rating dBA			71	72	73	79	78	78	78

Rated for 10,000 ft maximum elevation

(1) Operating Voltage Range: 187v minimum - 253v maximum

(2) HACR Type Circuit Breakers may be used.

(3) Requires 3/4" to 5/8" reducer from line to unit.

(4) Requires 7/8" to 3/4" reducer from line to unit.

(5) Requires 7/8" to 1-1/8" reducer from line to unit.

ACCESSORIES - Condensing Unit

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

High Wind Kit - NCUTD8KG

Available from <http://miamitech.com/products/metal/cutdnortek.html>

Low Ambient Kit - 918837

Cantilever Kit - 1018671

Allows the unit to be mounted on the side of a basement wall.

SYSTEM COOLING CAPACITIES
13.4 SEER2 — High Efficiency — Single Phase

Outdoor Unit	Indoor Unit	BTUH	SEER2	EER2	CFM
WSA4BD5M1SN18K	C75BHM018C-A	17,400	13.4	11.0	600
WSA4BD5M1SN24K	C75BHM02430C-A	23,000	13.4	11.0	700
WSA4BD5M1SN30K	C75BHM02430C-A	28,600	13.4	11.0	875
WSA4BD5M1SN36K	C75BHM03642C-B	34,800	13.4	11.0	1,050
WSA4BD5M1SN42K	C75BHM03642C-B	39,500	13.4	11.0	1,210
WSA4BD5M1SN48K	C75BHM04860C-C	46,000	13.4	11.0	1,400
WSA4BD5M1SN60K	C75BHM04860C-C	55,000	13.4	11.0	1,585

DTC is Designated test combination

See current AHRI Directory for certified combinations and ratings. All ratings are with time delay relay.

www.ahridirectory.org

COOLING EXPANDED RATINGS WITH COIL

WSA4BD5M1SN18K + C75B(A,H)M018(C,U)-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
525	80	62	16.6	13.0	1.05	17.1	14.6	1.17	16.3	14.5	1.30	15.4	14.1	1.44	14.5	13.7	1.60	13.5	13.2	1.77
	80	67	16.9	10.3	1.05	17.7	11.2	1.16	17.9	12.0	1.30	16.9	11.7	1.44	16.0	11.3	1.60	14.9	10.9	1.78
	80	72	17.0	8.0	1.05	15.9	7.5	1.16	18.1	8.8	1.29	18.6	9.3	1.44	17.6	8.9	1.61	16.4	8.5	1.79
	75	62	17.6	12.5	1.05	17.1	12.4	1.17	16.2	12.2	1.30	15.3	11.7	1.44	14.4	11.3	1.60	13.4	10.9	1.77
	75	67	15.4	8.0	1.05	18.5	10.0	1.17	17.8	9.7	1.30	16.9	9.4	1.44	15.9	9.0	1.60	14.9	8.6	1.78
600	80	62	16.7	13.2	1.09	17.4	15.5	1.20	16.6	15.1	1.33	15.7	15.0	1.47	14.8	14.5	1.63	13.9	13.9	1.81
	80	67	16.8	10.3	1.09	17.8	11.4	1.20	18.2	12.7	1.33	17.2	12.4	1.47	16.2	12.0	1.63	15.1	11.6	1.81
	80	72	16.9	8.0	1.09	15.8	7.5	1.20	18.1	8.8	1.33	19.0	9.7	1.47	17.9	9.3	1.64	16.7	8.9	1.83
	75	62	17.9	13.0	1.09	17.4	13.1	1.20	16.5	12.8	1.33	15.6	12.4	1.47	14.6	12.0	1.63	13.7	11.6	1.80
	75	67	15.4	8.0	1.09	18.8	10.3	1.20	18.1	10.1	1.33	17.1	9.8	1.47	16.2	9.4	1.63	15.1	8.9	1.81
675	80	62	16.6	13.3	1.12	17.6	16.3	1.23	16.8	16.2	1.36	15.9	15.7	1.51	15.1	15.1	1.66	14.3	14.3	1.84
	80	67	16.7	10.3	1.12	17.8	11.5	1.23	18.4	13.2	1.36	17.4	13.1	1.51	16.4	12.7	1.67	15.3	12.2	1.85
	80	72	16.8	7.9	1.12	15.7	7.4	1.23	18.1	8.8	1.36	19.2	10.0	1.51	18.1	9.7	1.68	16.9	9.3	1.86
	75	62	18.1	13.4	1.12	17.7	13.7	1.24	16.7	13.5	1.36	15.8	13.1	1.51	14.8	12.7	1.66	13.8	12.2	1.84
	75	67	15.4	8.0	1.12	19.0	10.5	1.23	18.4	10.5	1.37	17.4	10.1	1.51	16.4	9.7	1.67	15.2	9.3	1.85

WSA4BD5M1SN24K + C75B(A,H)M02430(C,U)-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
700	80	62	24.9	21.3	1.48	23.7	21.0	1.64	22.6	20.5	1.82	21.4	19.9	2.02	20.2	18.5	2.25	18.9	18.5	2.50
	80	67	25.9	16.6	1.48	25.8	17.2	1.64	24.6	16.4	1.83	23.4	16.5	2.03	22.2	15.9	2.26	20.7	15.4	2.52
	80	72	23.0	10.8	1.48	21.8	10.3	1.64	24.8	12.1	1.84	25.6	12.9	2.05	24.4	12.5	2.30	22.9	11.9	2.57
	75	62	24.7	17.7	1.48	23.7	17.6	1.64	22.5	17.1	1.82	21.4	16.6	2.02	20.1	16.0	2.24	18.8	15.4	2.50
	75	67	24.4	12.9	1.47	25.6	14.0	1.64	24.6	13.5	1.82	23.4	13.1	2.03	22.1	12.6	2.26	20.7	12.0	2.52
800	80	62	25.3	22.8	1.53	24.2	22.4	1.69	23.0	21.8	1.86	21.8	20.4	2.07	20.6	20.3	2.29	19.4	19.3	2.55
	80	67	26.1	16.9	1.52	26.4	18.2	1.69	25.2	17.9	1.87	23.8	17.5	2.08	22.5	16.9	2.31	21.0	16.3	2.57
	80	72	22.9	10.8	1.53	21.6	10.2	1.69	24.8	12.1	1.88	26.0	13.4	2.10	24.8	13.0	2.34	23.2	12.4	2.62
	75	62	25.2	18.5	1.53	24.1	18.7	1.69	22.9	18.1	1.87	21.7	17.5	2.06	20.4	17.0	2.29	19.1	16.4	2.55
	75	67	24.3	12.9	1.52	26.2	14.6	1.69	25.1	14.0	1.87	23.8	13.7	2.08	22.4	13.2	2.31	21.0	12.6	2.57
900	80	62	25.8	24.0	1.57	24.6	23.6	1.73	23.4	22.5	1.91	22.2	22.0	2.11	21.1	21.0	2.34	19.9	19.9	2.60
	80	67	26.3	17.3	1.56	26.8	19.0	1.73	25.6	18.9	1.91	24.1	18.4	2.12	22.7	17.8	2.36	21.2	17.2	2.61
	80	72	22.9	10.7	1.57	21.5	10.1	1.73	24.7	12.1	1.93	26.2	13.8	2.14	25.1	13.5	2.39	23.5	12.9	2.66
	75	62	25.5	19.3	1.57	24.4	19.6	1.73	23.2	19.1	1.91	22.0	18.5	2.11	20.6	18.0	2.34	19.3	17.3	2.59
	75	67	24.3	12.9	1.56	26.6	15.0	1.73	25.5	14.7	1.91	24.1	14.3	2.12	22.6	13.7	2.36	21.1	13.0	2.61

WSA4BD5M1SN30K + C75B(A,H)M02430(C,U)-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
875	80	62	27.6	21.3	1.79	28.2	23.1	1.97	27.1	22.9	2.18	25.8	22.3	2.41	24.5	21.8	2.70	22.9	21.1	3.08
	80	67	28.1	17.1	1.78	28.5	17.6	1.96	29.4	19.1	2.16	28.2	18.7	2.38	26.8	18.1	2.64	25.3	17.5	2.94
	80	72	28.4	13.4	1.78	26.8	12.6	1.95	29.1	13.8	2.15	30.5	14.8	2.37	29.0	14.2	2.62	27.4	13.6	2.91
	75	62	28.7	19.7	1.79	28.2	19.9	1.98	27.0	19.4	2.18	25.8	18.8	2.41	24.4	18.2	2.70	22.8	17.5	3.09
	75	67	25.8	13.3	1.77	30.2	15.9	1.97	29.4	15.6	2.16	28.1	15.1	2.39	26.7	14.5	2.64	25.2	13.8	2.94
1000	80	62	27.8	21.7	1.84	28.8	24.3	2.03	27.7	24.1	2.23	26.3	23.8	2.46	24.9	23.2	2.75	23.3	22.3	3.14
	80	67	28.1	17.1	1.84	28.6	17.8	2.01	30.0	20.0	2.22	28.7	19.6	2.44	27.2	19.0	2.69	25.7	18.4	3.00
	80	72	28.2	13.3	1.83	26.6	12.5	2.00	29.1	13.9	2.20	31.0	15.2	2.43	29.5	14.8	2.68	27.8	14.1	2.97
	75	62	29.1	20.3	1.85	28.8	20.8	2.04	27.6	20.4	2.23	26.3	19.8	2.47	24.8	19.1	2.76	23.2	18.4	3.14
	75	67	25.5	13.1	1.83	30.6	16.3	2.02	30.0	16.2	2.22	28.6	15.6	2.44	27.1	15.0	2.69	25.6	14.3	3.00
1125	80	62	28.0	22.1	1.90	29.2	25.5	2.09	28.1	25.5	2.29	26.7	25.1	2.52	25.3	24.3	2.81	23.7	23.4	3.19
	80	67	28.0	17.0	1.89	28.7	18.0	2.07	30.5	20.8	2.27	29.1	20.4	2.50	27.5	19.9	2.75	26.0	19.3	3.06
	80	72	28.1	13.1	1.89	26.4	12.3	2.06	29.1	13.8	2.26	31.3	15.7	2.49	29.9	15.2	2.74	28.1	14.5	3.03
	75	62	29.4	20.8	1.91	29.3	21.7	2.09	28.0	21.3	2.29	26.6	20.7	2.52	25.1	20.0	2.81	23.5	19.3	3.20
	75	67	25.5	13.1	1.88	30.9	16.6	2.08	30.4	16.6	2.28	28.9	16.1	2.50	27.5	15.5	2.75	25.9	14.8	3.06

COOLING EXPANDED RATINGS WITH COIL (CONTINUED)

WSA4BD5M1SN36K + C75B(A,H)M03642(C,U)-B

O.D.T		65°F			75°F			85°F			95°F			105°F			115°F			
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
1050	80	62	34.2	27.8	2.13	33.9	28.6	2.36	32.6	28.3	2.58	31.0	27.3	2.82	29.1	26.9	3.08	27.1	26.0	3.36
	80	67	32.8	19.8	2.13	36.5	23.5	2.35	35.7	23.6	2.59	34.1	23.0	2.84	32.2	22.4	3.10	30.1	21.5	3.39
	80	72	32.9	15.4	2.14	33.4	15.7	2.36	37.6	18.2	2.59	37.4	18.3	2.85	35.4	17.6	3.12	33.3	16.8	3.42
	75	62	34.7	24.5	2.13	33.8	24.4	2.36	32.5	24.0	2.59	30.9	23.2	2.82	29.1	22.4	3.08	27.0	21.5	3.36
	75	67	34.0	17.7	2.13	36.7	19.6	2.36	35.6	19.2	2.59	34.0	18.5	2.84	32.1	17.8	3.10	30.1	16.9	3.39
1200	80	62	34.7	29.0	2.19	34.6	30.3	2.42	33.2	29.7	2.65	31.5	29.6	2.89	29.6	28.6	3.15	27.6	27.3	3.44
	80	67	32.6	19.7	2.20	37.1	24.3	2.42	36.4	24.8	2.66	34.7	24.1	2.91	32.7	23.6	3.17	30.5	22.8	3.46
	80	72	32.7	15.3	2.20	33.2	15.6	2.42	37.9	18.4	2.66	37.9	18.9	2.91	36.0	18.3	3.19	33.8	17.5	3.49
	75	62	35.4	25.6	2.19	34.5	25.6	2.42	33.1	25.2	2.66	31.4	24.5	2.89	29.4	23.7	3.15	27.4	22.7	3.43
	75	67	33.9	17.5	2.20	37.3	20.1	2.42	36.3	19.9	2.66	34.6	19.2	2.91	32.6	18.4	3.17	30.5	17.5	3.46
1350	80	62	34.9	29.6	2.25	35.0	31.9	2.49	33.7	31.6	2.72	31.9	31.0	2.96	30.1	30.0	3.22	28.3	28.3	3.51
	80	67	32.4	19.6	2.27	37.4	25.0	2.48	36.9	25.9	2.72	35.1	25.2	2.97	33.0	24.7	3.24	30.8	24.0	3.53
	80	72	32.5	15.1	2.27	33.0	15.4	2.49	38.0	18.5	2.72	38.2	19.4	2.98	36.3	18.9	3.26	34.1	18.0	3.56
	75	62	35.9	26.6	2.25	35.0	26.7	2.49	33.5	26.5	2.72	31.8	25.7	2.96	29.8	24.8	3.22	27.6	23.9	3.50
	75	67	33.7	17.5	2.26	37.7	20.6	2.49	36.7	20.5	2.73	34.9	19.8	2.98	32.9	19.0	3.24	30.7	18.1	3.53

WSA4BD5M1SN42K + C75B(A,H)M03642(C,U)-B

O.D.T		65°F			75°F			85°F			95°F			105°F			115°F			
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
1210	80	62	39.5	31.8	2.50	38.8	32.4	2.72	37.3	31.9	2.98	35.6	31.0	3.26	33.6	30.6	3.58	31.6	29.6	3.93
	80	67	38.6	23.4	2.49	41.7	26.7	2.73	40.8	26.7	2.99	39.0	26.1	3.28	37.0	25.2	3.60	34.8	24.4	3.96
	80	72	38.2	17.9	2.49	39.3	18.5	2.72	42.8	20.6	2.99	42.4	20.7	3.29	40.5	20.0	3.61	38.3	19.1	3.98
	75	62	40.0	28.0	2.50	38.8	27.7	2.73	37.2	27.0	2.98	35.5	26.3	3.26	33.6	25.4	3.58	31.6	24.5	3.93
	75	67	39.8	20.7	2.50	42.0	22.3	2.74	40.7	21.7	2.99	38.8	21.0	3.28	36.8	20.2	3.60	34.7	19.3	3.95
1400	80	62	40.2	33.3	2.58	39.8	34.4	2.81	38.1	34.0	3.07	36.3	33.4	3.35	34.2	32.6	3.67	32.2	31.4	4.02
	80	67	38.5	23.4	2.58	42.5	27.7	2.82	41.7	28.2	3.08	39.7	27.5	3.36	37.6	26.7	3.69	35.3	25.9	4.04
	80	72	38.2	17.9	2.58	39.1	18.3	2.81	43.2	20.9	3.08	43.1	21.4	3.37	41.1	20.7	3.70	38.8	19.9	4.07
	75	62	40.8	29.3	2.59	39.6	29.1	2.82	38.0	28.4	3.07	36.1	27.8	3.35	34.1	26.9	3.67	32.0	25.9	4.02
	75	67	39.7	20.7	2.58	42.6	22.8	2.82	41.5	22.6	3.08	39.6	21.9	3.37	37.5	20.9	3.69	35.2	20.0	4.04
1575	80	62	40.6	34.2	2.66	40.3	36.2	2.89	38.6	35.6	3.14	36.7	35.1	3.43	34.7	34.0	3.75	32.9	32.9	4.10
	80	67	38.3	23.3	2.65	42.8	28.5	2.90	42.0	29.3	3.15	40.2	28.7	3.45	38.0	27.7	3.77	35.7	27.1	4.13
	80	72	38.1	17.7	2.65	38.8	18.2	2.88	43.2	21.0	3.15	43.5	21.9	3.45	41.5	21.5	3.78	39.2	20.6	4.15
	75	62	41.3	30.2	2.67	40.2	30.4	2.90	38.5	29.6	3.15	36.5	29.1	3.43	34.5	28.2	3.75	32.3	27.3	4.10
	75	67	39.6	20.5	2.66	43.1	23.4	2.90	42.1	23.3	3.16	40.0	22.5	3.45	37.9	21.6	3.77	35.5	20.7	4.12

WSA4BD5M1SN48K + C75B(A,H)M04860(C,U)-C

O.D.T		65°F			75°F			85°F			95°F			105°F			115°F			
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
1400	80	62	49.3	39.9	2.94	47.8	39.5	3.23	45.9	38.9	3.56	43.7	37.8	3.92	41.4	36.7	4.32	38.8	35.7	4.78
	80	67	47.9	28.9	2.92	50.9	32.1	3.22	50.0	32.3	3.56	47.8	31.5	3.94	45.3	30.5	4.36	42.6	29.5	4.82
	80	72	48.1	22.5	2.92	45.8	21.5	3.20	44.2	20.7	3.51	49.4	23.7	3.93	49.3	24.1	4.37	46.7	23.2	4.84
	75	62	49.3	34.3	2.94	47.7	33.7	3.23	45.7	32.9	3.56	43.6	31.9	3.92	41.2	30.7	4.32	38.7	29.5	4.78
	75	67	43.8	22.6	2.91	50.2	26.4	3.23	49.6	26.4	3.56	47.6	25.6	3.94	45.2	24.5	4.36	42.5	23.4	4.82
1600	80	62	50.4	42.1	3.03	48.8	41.7	3.32	46.7	40.9	3.65	44.4	40.3	4.01	42.0	39.2	4.42	39.4	37.8	4.87
	80	67	47.7	28.9	3.01	51.5	33.1	3.32	50.9	33.9	3.66	48.6	33.1	4.04	46.0	32.2	4.46	43.2	31.0	4.92
	80	72	47.8	22.4	3.01	45.5	21.3	3.29	43.9	20.5	3.60	49.6	23.9	4.02	50.0	24.9	4.46	47.4	24.0	4.94
	75	62	50.6	36.0	3.03	48.7	35.3	3.33	46.6	34.5	3.65	44.4	33.5	4.01	41.9	32.4	4.42	39.3	31.1	4.87
	75	67	43.5	22.3	3.00	50.6	26.8	3.32	50.5	27.3	3.66	48.5	26.5	4.04	45.9	25.4	4.46	43.1	24.2	4.92
1800	80	62	51.4	44.0	3.12	49.6	44.1	3.41	47.4	43.5	3.74	45.0	42.5	4.11	42.5	41.1	4.51	39.9	39.7	4.97
	80	67	47.5	28.8	3.10	52.0	33.8	3.41	51.6	35.3	3.75	49.3	34.6	4.13	46.5	33.7	4.55	43.6	32.6	5.01
	80	72	47.6	22.2	3.10	45.2	21.1	3.37	43.6	20.3	3.69	49.5	23.8	4.11	50.5	25.5	4.56	47.8	24.8	5.03
	75	62	51.4	37.4	3.13	49.4	36.8	3.42	47.3	36.2	3.74	44.9	35.0	4.11	42.4	33.9	4.51	39.6	32.6	4.97
	75	67	43.3	22.2	3.09	50.8	27.0	3.41	51.4	28.3	3.75	49.1	27.3	4.13	46.4	26.3	4.55	43.5	25.1	5.01

COOLING EXPANDED RATINGS WITH COIL (CONTINUED)

WSA4BD5M1SN60K + C75B(A,H)M04860(C,U)-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
1585	80	62	57.7	46.0	3.48	55.6	45.4	3.80	53.1	44.3	4.18	50.5	43.2	4.61	47.9	41.9	5.11	45.1	40.7	5.66
	80	67	57.2	34.6	3.46	59.4	37.2	3.80	58.0	37.3	4.19	55.2	36.2	4.65	52.2	35.0	5.15	49.3	33.7	5.71
	80	72	57.7	27.2	3.46	54.8	25.8	3.77	51.9	24.4	4.12	57.7	27.7	4.63	57.2	27.8	5.16	54.0	26.7	5.73
	75	62	57.5	39.6	3.48	55.3	38.8	3.81	52.9	37.7	4.18	50.4	36.4	4.61	47.8	35.1	5.10	45.0	33.7	5.66
	75	67	52.7	27.3	3.44	58.8	30.8	3.80	57.7	30.6	4.20	55.1	29.4	4.65	52.1	28.2	5.15	49.3	27.1	5.70
1875	80	62	59.4	49.0	3.61	57.0	48.6	3.94	54.3	47.4	4.32	51.7	46.5	4.76	48.8	45.3	5.25	45.9	43.9	5.80
	80	67	57.2	34.8	3.59	60.4	38.7	3.94	59.5	39.5	4.33	56.4	38.4	4.79	53.3	37.2	5.29	50.1	35.9	5.85
	80	72	57.4	26.9	3.59	54.5	25.6	3.90	51.6	24.2	4.25	58.0	28.0	4.76	58.2	28.9	5.30	55.0	27.9	5.87
	75	62	59.1	42.0	3.62	56.7	41.1	3.95	54.2	40.0	4.32	51.5	38.9	4.75	48.7	37.5	5.25	45.8	36.1	5.80
	75	67	52.3	27.0	3.57	59.5	31.5	3.93	59.1	31.9	4.34	56.2	30.8	4.79	53.2	29.5	5.29	50.0	28.2	5.85
2000	80	62	59.7	50.4	3.67	57.5	50.1	4.00	54.7	49.1	4.38	52.0	48.0	4.81	49.1	46.6	5.31	46.2	45.0	5.86
	80	67	57.1	34.7	3.65	60.8	39.2	3.99	59.9	40.4	4.39	56.8	39.3	4.85	53.6	38.2	5.35	50.5	36.9	5.91
	80	72	57.1	26.8	3.65	54.3	25.4	3.95	51.3	24.0	4.31	58.0	28.0	4.82	58.5	29.3	5.36	55.3	28.5	5.93
	75	62	59.6	42.9	3.68	57.2	42.0	4.01	54.6	41.0	4.38	51.9	39.8	4.81	49.0	38.4	5.31	46.1	37.0	5.86
	75	67	52.1	26.8	3.63	59.7	31.8	3.99	59.6	32.5	4.40	56.6	31.3	4.85	53.5	30.0	5.35	50.3	28.7	5.91



GENERAL TERMS OF LIMITED WARRANTY

Nortek Global HVAC, LLC will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nortek Global HVAC, LLC warranty department for a copy.

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (10/24)