


Submittal

TAG:

Multi-Position Cased Coils Cooling and Heat Pump Compatible Cooling capacity: 30–60 kBTU/h

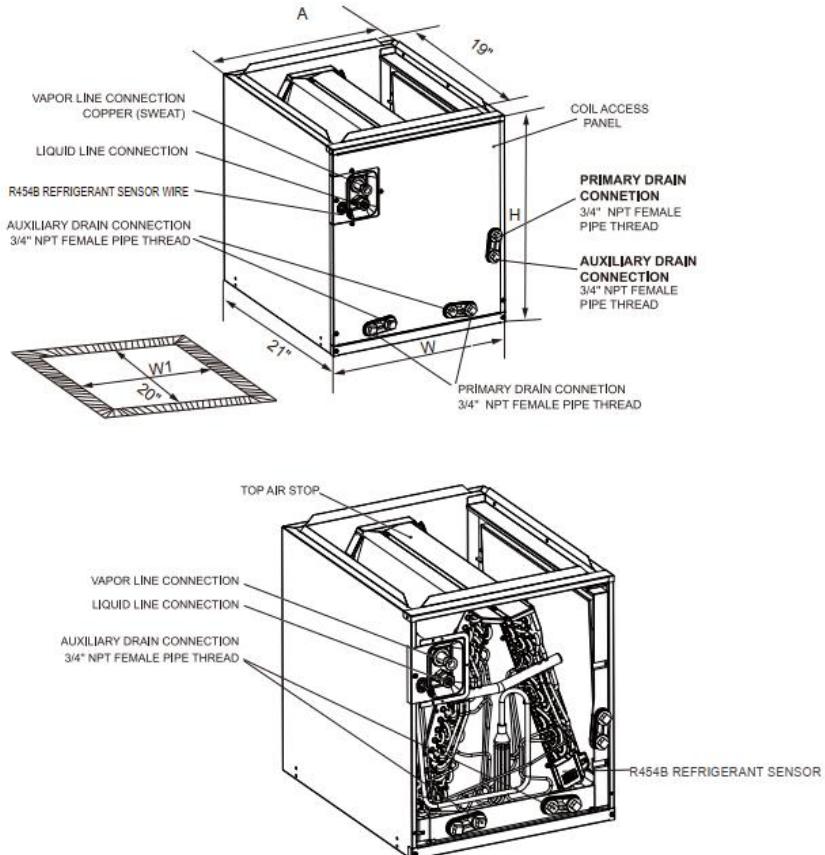

MODELS	Unit Dimensions IN. [mm]					WEIGHT (LBS. [kg])
	UNIT HEIGHT "H"	UNIT WIDTH "W"	SUPPLY DUCT "A"	"W1"	LIQUID LINE/ VAPOR LINE	
TCCM3036AAOH	20 [508]	14-1/2 [368]	13 [330]	13-1/2 [343]	3/8 / 3/4	44 [20]

Specifications

TCCM3036AAOH	
INSTALLATION	Multiple position
AIR OUTLET (W x H) (in.)	13 x 19
NOMINAL RATING	
Max. Cooling (BTU/h)	30,000/36,000
EVAPORATOR COIL	
Type	Tube & Fin
Tube Material	Aluminum
Tube Size (in.)	9/32
REFRIGERANT CONNECTION SIZE	
Liquid Line Size (O.D.) (in.)	3/8
Suction Line Size (O.D.) (in.)	3/4
Dimension	
Net dimensions (W x H x D) (in.)	21 x 14-1/2 x 20
Packed dimensions (W x H x D) (in.)	24-15/16 x 24-3/16 x 22-1/4
WEIGHT	
Net weight (lbs.)	44
Shipping weight (lbs.)	48.5

Features

- Safe, low-GWP R454B refrigerant with leak alarm function.
- High efficiency and energy saving, AHRI energy efficiency certification.
- Multi-position installation accommodates a variety of installation scenarios.
- Broad cooling range from 55°F to 120°F, powered by extra-wide Operation Range Control Technology.
- Stable heating down to 5°F through Intelligent Frost Control.
- Optimized blower control ensures rapid start and stable operation.
- Outdoor DC motor with 10 taps, adjusted automatically by ambient temperature.
- 15.2 AC Series provides up to 15.2 SEER2 cooling efficiency when matched with 15.2 AC outdoor units.
- 15.2 HP Series provides up to 15.2 SEER2 cooling efficiency and 7.8 HSPF2 heating efficiency when matched with 15.2 AC outdoor units.
- 13.4 AC Series provides up to 14.3 SEER2 cooling efficiency when matched with 13.4 AC outdoor units.
- Multiple floating-operation protections for enhanced system stability and security.
- UL 2-40 60335 Certificated

