
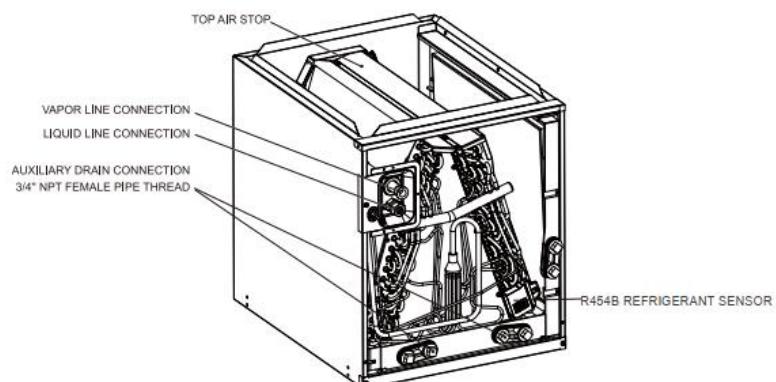


Submittal

TAG:

Multi-Position Cased Coils Cooling and Heat Pump Compatible Cooling capacity: 30–60 kBTU/h

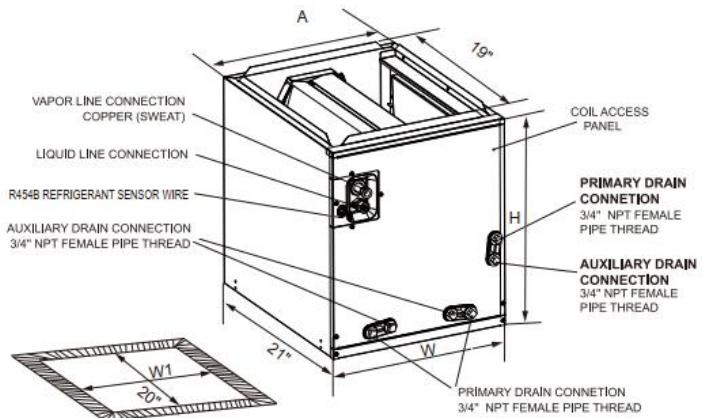

| MODELS | Unit Dimensions IN. [mm] | | | | | WEIGHT (LBS. [kg]) |
|--------------|--------------------------|-------------------|--------------------|----------|----------------------------|-----------------------|
| | UNIT HEIGHT "H" | UNIT WIDTH "W" | SUPPLY DUCT "A" | "W1" | LIQUID LINE/ VAPOR LINE | |
| TCCM4248CAOH | 30 [762] | 21 [533] | 19-1/2 [495] | 20 [508] | 3/8 / 3/4 | 73 [33] |

Specifications

| TCCM4248CAOH | |
|-------------------------------------|------------------------------|
| INSTALLATION | Multiple position |
| AIR OUTLET (W x H) (in.) | 19-1/2 x 19 |
| NOMINAL RATING | |
| Max. Cooling (BTU/h) | 42,000/48,000 |
| EVAPORATOR COIL | |
| Type | Tube & Fin |
| Tube Material | Aluminum |
| Tube Size (in.) | 3/8 |
| REFRIGERANT CONNECTION SIZE | |
| Liquid Line Size (O.D.) (in.) | 3/8 |
| Suction Line Size (O.D.) (in.) | 3/4 |
| Dimension | |
| Net dimensions (W x H x D) (in.) | 21 x 21 x 30 |
| Packed dimensions (W x H x D) (in.) | 24-15/16 x 24-3/16 x 32-5/16 |
| WEIGHT | |
| Net weight (lbs.) | 73 |
| Shipping weight (lbs.) | 79 |

Features

- Safe, low-GWP R454B refrigerant with leak alarm function.
- High efficiency and energy saving, AHRI energy efficiency certification.
- Multi-position installation accommodates a variety of installation scenarios.
- Broad cooling range from 55°F to 120°F, powered by extra-wide Operation Range Control Technology.
- Stable heating down to 5°F through Intelligent Frost Control.
- Optimized blower control ensures rapid start and stable operation.
- Outdoor DC motor with 10 taps, adjusted automatically by ambient temperature.
- 15.2 AC Series provides up to 15.2 SEER2 cooling efficiency when matched with 15.2 AC outdoor units.
- 15.2 HP Series provides up to 15.2 SEER2 cooling efficiency and 7.8 HSPF2 heating efficiency when matched with 15.2 AC outdoor units.
- 13.4 AC Series provides up to 14.3 SEER2 cooling efficiency when matched with 13.4 AC outdoor units.
- Multiple floating-operation protections for enhanced system stability and security.
- UL 2-40 60335 Certificated

