



Submittal Data Sheet

Condenser Model#: AC-I-36-INV-HP-PKG

36K R32 ROOFTOP PACKAGE UNIT DC INVERTER HEAT PUMP SYSTEM

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



UNIT SPECIFICATIONS		
Compressor Type	DC Inverter Twin-rotary	
Compressor Model	KTM240D57UMT	
Refrigerant Type	R32	
Refrigerant Charge (oz/kg)	2.9(102.3)	
Refrigerant Oil	VG74	
Refrigerant Oil Charge (mL)	670	
Outdoor Fan Motor Model	DQ-DRN-310-200-8-A	
Outdoor Airflow (CFM)	3200	
Indoor Fan Motor Model	DQ-ZKSD-370-10-6	
Indoor Airflow (CFM)	1120	
Noise level (dBA)	74	
Dimension (W×D×H)	inch	50.71 x 35.04 x 46.85
	mm	1288 x 890 x 1190
Package (W×D×H)	inch	51.42 x 35.67 x 48.35
	mm	1306 x 906 x 1228
Net/Gross Weight	lbs	415 / 428
	kg	188 / 194


EFFICIENCY RATINGS			
Cooling		Heating	
SEER2	18.5	HSPF2-4	8.2
EER2	10.8	COP	12.00

COOLING PERFORMANCE	
Cooling (Btu/hr)	
Rated Capacity	34200
Standard Operating Range (°F/°C)	23°F ~ 125°F (-5°C ~ 52°C)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB/75°F WB

HEATING PERFORMANCE	
Heating (Btu/hr)	
Rated Capacity	34200
1. @ 17°F Rated	26000
2. @ 5°F Rated: Capacity / COP	24400 (1.86)
Standard Operating Range (°F/°C)	-4°F ~ 86°F (-20°C ~ 30°C)
Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 47°F DB/43°F WB
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 17°F DB/15°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 5°F DB/5°F WB



ELECTRICAL SPECIFICATIONS	
Power Supply	208/230V, 60Hz, 1Ph
MCA	29.65
MAX. FUSE (MOP)	45
Communication Wiring	AWG 25×3 Shielded
Compressor RLA	19
Outdoor Fan Motor W	200
Outdoor Fan Motor RLA	2.1
Indoor Fan Motor RLA	3.8
Indoor Fan Motor W	370
System Power Input @ Cooling (W)	3167
System Power Input @ Heating (W)	2850
MCA: Min. circuit amps (A)	MOP: Max. Overcurrent Protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

UNIT DIMENSIONS

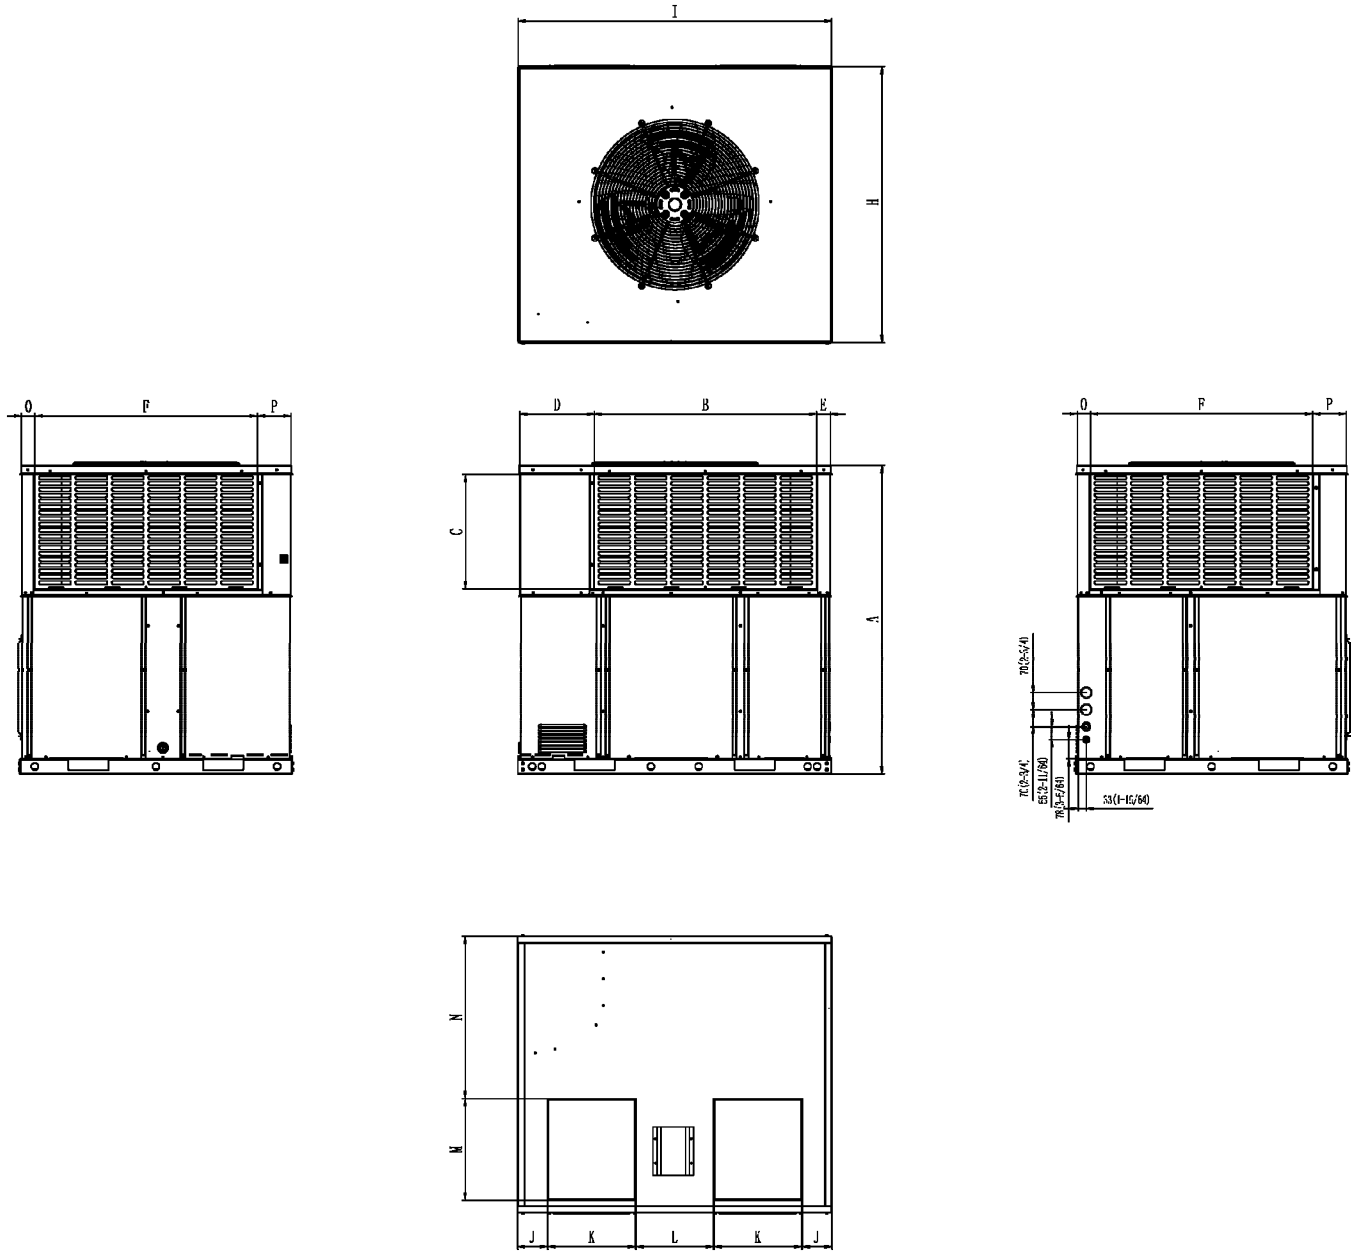


Dimensions	Model	24K/36K		48K/60K	
		inch	mm	inch	mm
A	Model Height	46-47/64	1187	50-3/64	1271
B	Outdoor Coil Return Air Opening Width	35-3/4	906	36-17/32	928
C	Outdoor Coil Return Air Opening Height	15-7/16	392	15-7/16	392
D	Outdoor Coil Return Air Opening Side Clearance 1	12-9/16	319	12-9/16	319
E	Outdoor Coil Return Air Opening Side Clearance 2	2-31/64	63	2-51/64	71
F	Outdoor Coil Side Return Air Opening Width	24-23/32	628	36-17/32	928
H	Model Depth	35 3/64	890	44 51/64	1138
I	Model Width	50-45/64	1288	51-37/64	1310
J	Indoor Coil Return Air Opening Side Clearance	3-5/64	78	4-7/8	124
K	Indoor Coil Return? Air Opening Width	9-49/64	248	14-3/8	365
L	Indoor Coil Return Air Opening Both Clearance	21-13/16	554	12-23/32	323
M	Indoor Coil Return Air Opening Height	16-27/64	417	16-27/64	417
N	Indoor Coil Return Air Opening Top Clearance	16-11/32	415	26-11/32	669
O	Outdoor Coil Return Air Opening Back Clearance	2-33/64	64	2-31/64	63
P	Outdoor Coil Return Air Opening Front Clearance	7-51/64	198	5-25/32	147

UNIT INSTALLATION INSTRUCTIONS & CLEARANCE REQUIREMENTS

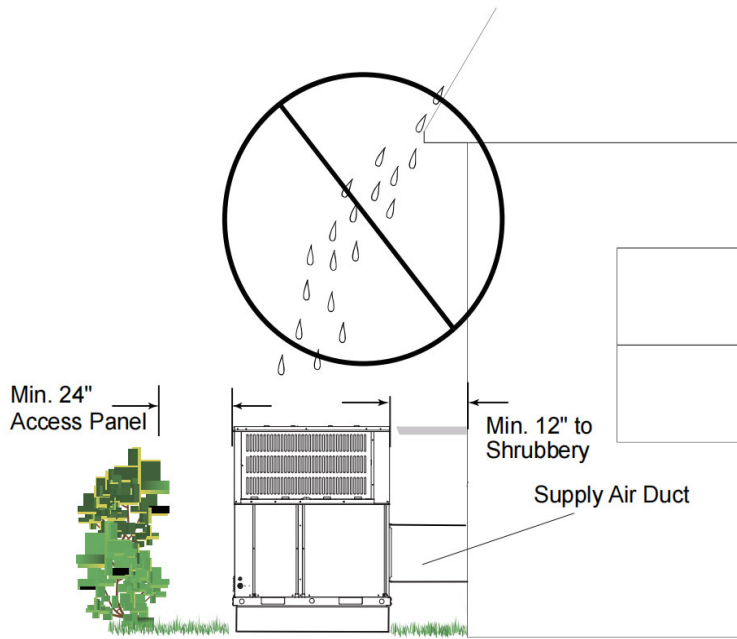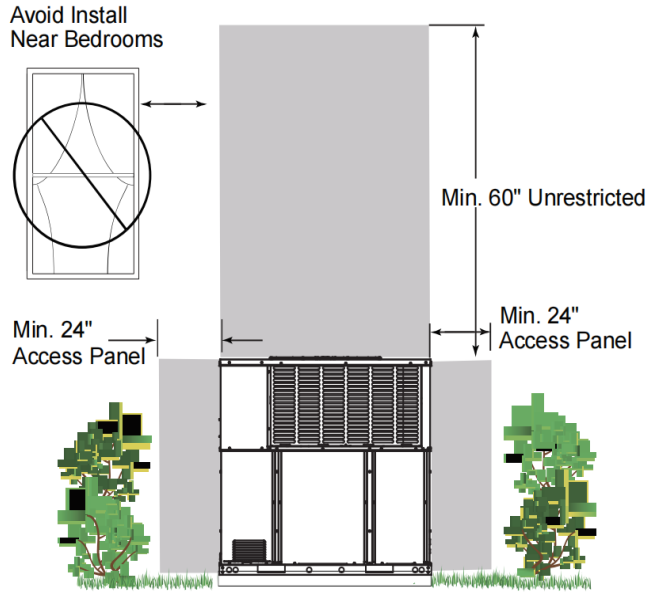

INDOOR FAN PERFORMANCE

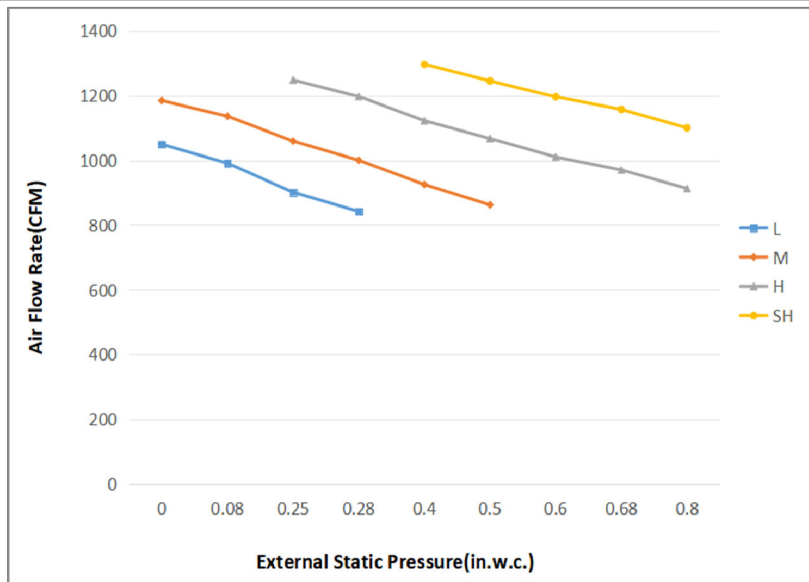

FEATURES

- DC inverter compressor
- R32 Refrigerant, environment friendly
- Refrigerant cooling PCB, high reliability
- Horizontal or downflow application
- Static pressure up to 0.80 In.W.G
- Optional Auxiliary heat kit up to 15kW
- Easy Maintenance
- Multiple control options available:
 - Wired controller
 - Wired controller with built-in WiFi
 - Third-Party 24V Thermostat
- Crankcase heater equipped as standard

