

Submittal Data Sheet

Indoor Unit Model#: AC-I-4860ACL-24

Outdoor Unit Model#: AC-I-60HP14

R32 4860ACL 24.5" EVAPORATOR A-COIL & 60K TOP-DISCHARGE HEAT PUMP CONDENSER

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

System UPC Product Code: 810175556499

A-Coil UPC Product Code: 810175554075

Outdoor Unit UPC Product Code: 810175555928



EFFICIENCY RATINGS

Cooling		Heating	
SEER2	13.4	HSPF2-4	7.5
EER2	11.7	HSPF2-5	7.5

COOLING PERFORMANCE

Cooling (Btu/hr)	
Rated Capacity	52500

HEATING PERFORMANCE

Heating (Btu/hr)	
Rated Capacity	53000
5°F (-15°C) Rated Capacity	27500

OPERATIONAL SPECIFICATIONS

Indoor Unit Operating Temperature Range		
Heating & Cooling	°F	62.6°F ~ 89.6°F
	°C	17°C ~ 32°C
Outdoor Unit Operating Temperature Range		
Cooling	°F	23°F ~ 125.6°F
	°C	-5°C ~ 52°C
Heating	°F	-4°F ~ 86°F
	°C	-20°C ~ 30°C

ELECTRICAL SPECIFICATIONS

Indoor Power Supply	V, Ph, Hz	24V, 1 Ph, 60Hz
Outdoor Power Supply	V, Ph, Hz	208/230V, 1 Ph, 60Hz
Outdoor MCA	A	40
Outdoor MOP	A	50

EVAPORATOR A-COIL SPECIFICATIONS

Dimension (W×D×H)	inch	24.49 x 21.02 x 27.80
	mm	622 x 534 x 706
Package (W×D×H)	inch	28.15 x 27.36 x 30.12
	mm	715 x 695 x 765
Net/Gross Weight	lbs	97.0 / 115.0
	kg	43.9 / 52.2


OUTDOOR UNIT SPECIFICATIONS

Compressor Type	--	Scroll
Compressor Model	--	SKDC049N1ULB
Compressor Capacity	W	19620
Compressor Rated Power Input	W	3090
Compressor Rated Current RLA	A	13.6
Refrigerant Oil Type	--	VG46
Refrigerant Oil Charge	mL	1240
Outdoor Noise Level	dBA	60.0
Outdoor Airflow	CFM	2950
Outdoor Fan Motor Type	--	BLDC Motor
Outdoor Fan Motor Power Input	W	200
Outdoor Fan Motor RLA	A	0.92
Dimension (W×D×H)	inch	29.13 x 29.13 x 32.87
	mm	740 x 740 x 835
Package (W×D×H)	inch	30.32 x 30.32 x 34.06
	mm	770 x 770 x 865
Net/Gross Weight	lbs	182.0 / 193.0
	kg	82.5 / 87.5

REFRIGERANT & PIPING SPECIFICATIONS


Throttle type (Indoor)	--	TXV
Refrigerant Type	--	R32
Refrigerant Charge	oz	102.28
	kg	2.90
Design Pressure	PSIG	609 / 174
	mpa	4.20 / 1.20
Liquid Side	in	3/8"
	mm	9.53
Gas Side	in	3/4"
	mm	19.05
Max. Piping Length (Condenser Pre-Charge)	ft	24.6
	m	7.5
Max. Piping Length	ft	213.0
	m	65.0
Max. Height Difference	ft	98.0
	m	30.0
Drainage Water Pipe Diameter (O.D.)	in	3/4"
	mm	19
Connection Method	Indoor Unit	Braze
	Outdoor Unit	Flare to Braze

EVAPORATOR A-COIL DIMENSIONS

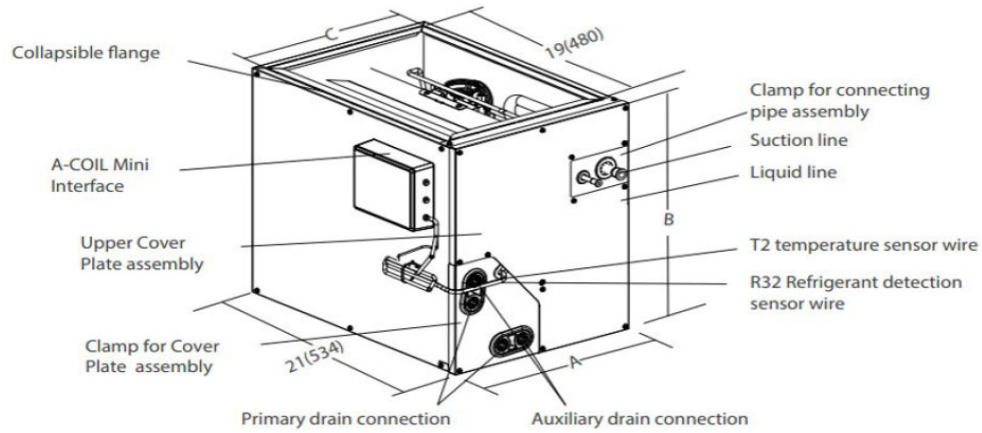

Model	AC-I-3036ACL-17		AC-I-3036ACL-21	
Dimensions	inch	mm	inch	mm
A	17-1/2	445	21	534
B	23-1/2	599	23-1/2	599
C	16-2/5	416	19-3/4	505
Model	AC-I-4860ACL-21		AC-I-4860ACL-24	
Dimensions	inch	mm	inch	mm
A	21	534	24-1/2	622
B	27-4/5	706	27-4/5	706
C	19-3/4	505	23-2/5	594

OUTDOOR UNIT DIMENSIONS

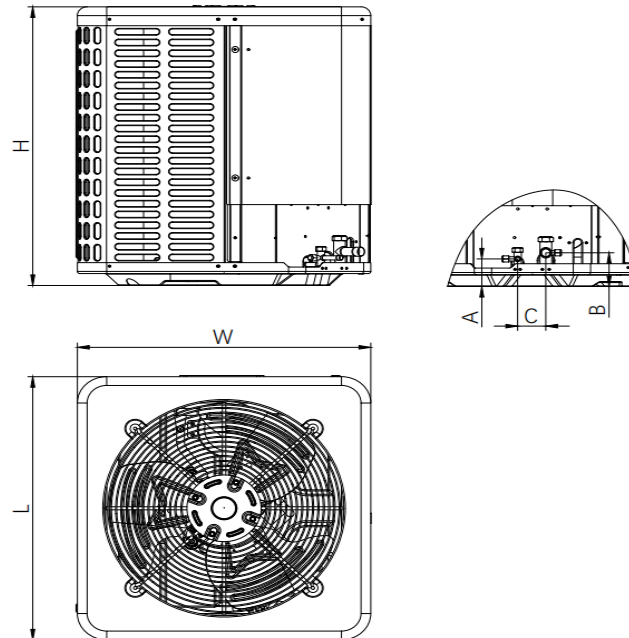

Dimensions \ Model		18K/24K		30K/36K		42K/48K/60K	
		inch	mm	inch	mm	inch	mm
W	Model width	23-5/8	600	29-9/64	740	29-9/64	740
L	Model length	23-5/8	600	29-9/64	740	29-9/64	740
H	Model height	25	635	25	635	32-7/8	835
A	Liquid side valve height	2-31/64	63	2-31/64	63	2-31/64	63
B	Distance between two valves	3-1/32	77	3-1/32	77	3-1/32	77
C	Gas side valve height	2-9/32	58	2-9/32	58	2-9/32	58

OUTDOOR UNIT INSTALLATION INSTRUCTIONS & CLEARANCE REQUIREMENTS

